

DynExcel SK75 Mélange

Braided and double braided ropes

DESCRIPTION AND FEATURES

Double braided rope with high tenacity polyester external cover and Dyneema® SK75 (HMPE) braided inner core impregnated with protective polyurethane resin.

This structure gives it great lightness and resistance to breakage, abrasion and weather with extremely low elongation.

The 16/24 spindle construction process with opposing and balanced anti-turn twists makes it flexible and compact and keeps it soft and easy to handle even after intense and prolonged use. This double braided rope is spliceable with medium difficulty and is suitable for all those specific technical uses where maximum level performance, stability and reliability are required.

USE

Nautical: suitable as a sheet and halyard for cruising and racing boats. In thinner diameters it is used as a line for spearguns, optimist, lasers and dinghies.


Industry and construction: suitable for use with pulleys and hoists, securing and lifting extremely heavy loads, and for tensile structures.

NOTES

Other colours, diameters and packagings available on request.



COLOURS

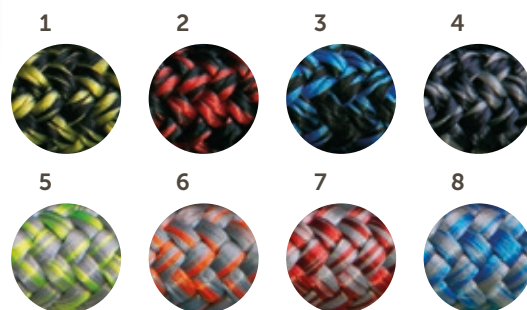

The data in the table are indicative and subject to change without notice

Code 1 yellow black	Code 2 red black	Code 3 light blue black	Code 4 grey black	Ø mm.	Weight gr./mt.	Break. load kg.	Packaging type	Length mt.
226.11815	226.11915	226.11715	226.11415	1,5	2	230	flanged reel	100
226.11818	226.11918	226.11718	226.11418	1,8	2,5	300	flanged reel	100
226.11802	226.11902	226.11702	226.11402	2	4	360	flanged reel	100
226.11825	226.11925	226.11725	226.11425	2,5	4,5	490	flanged reel	100
226.11803	226.11903	226.11703	226.11403	3	10	690	flanged reel	100
226.11804	226.11904	226.11704	226.11404	4	15	1000	flanged reel	100
226.11805	226.11905	226.11705	226.11405	5	20	1400	flanged reel	100
226.11806	226.11906	226.11706	226.11406	6	25	1800	flanged reel	100
226.11807	226.11907	226.11707	226.11407	7	35	2800	flanged reel	100
226.11808	226.11908	226.11708	226.11408	8	45	4400	flanged reel	100
226.11810	226.11910	226.11710	226.11410	10	65	6100	flanged reel	100
226.11812	226.11912	226.11712	226.11412	12	95	8300	flanged reel	100
226.11814	226.11914	226.11714	226.11414	14	120	11200	flanged reel	100
226.11816	226.11916	226.11716	226.11416	16	160	12700	flanged reel	100

Code 5 grey fluo yellow	Code 6 grey fluo orange	Code 7 grey red	Code 8 grey light blue	Ø mm.	Weight gr./mt.	Break. load kg.	Packaging type	Length mt.
226.11515	226.11615	226.11215	226.11315	1,5	2	230	flanged reel	100
226.11518	226.11618	226.11218	226.11318	1,8	2,5	300	flanged reel	100
226.11502	226.11602	226.11202	226.11302	2	4	360	flanged reel	100
226.11525	226.11625	226.11225	226.11325	2,5	4,5	490	flanged reel	100
226.11503	226.11603	226.11203	226.11303	3	10	690	flanged reel	100
226.11504	226.11604	226.11204	226.11304	4	15	1000	flanged reel	100
226.11505	226.11605	226.11205	226.11305	5	20	1400	flanged reel	100
226.11506	226.11606	226.11206	226.11306	6	25	1800	flanged reel	100
226.11507	226.11607	226.11207	226.11307	7	35	2800	flanged reel	100
226.11508	226.11608	226.11208	226.11308	8	45	4400	flanged reel	100
226.11510	226.11610	226.11210	226.11310	10	65	6100	flanged reel	100
226.11512	226.11612	226.11212	226.11312	12	95	8300	flanged reel	100
226.11514	226.11614	226.11214	226.11314	14	120	11200	flanged reel	100
226.11516	226.11616	226.11216	226.11316	16	160	12700	flanged reel	100