

FlatSling

Flat slings and round slings

DESCRIPTION AND FEATURES

High tenacity polyester flat webbing sling, a synthetic fibre that gives excellent resistance to breakage and weather with very low elongation.

The double layer construction process ensures high toughness and maximum resistance to abrasion and wear, while the protective coating of the buttonholes facilitates the insertion of lifting hooks. The webbings used for the construction of these slings are of the highest quality, coloured and heat-set to ensure the dimensional stability of the sling and resist most mineral acids.

The sewings are managed by expert craftsmen to ensure maximum safety and reliability even after heavy and continuous use.

Each sling is certified with CE marking and complies with the European standard UNI EN 1492/1-2.

USE

Industry and construction: suitable for lifting and handling loads of all types (bundles of pipes, pallets, containers, large machinery, etc.) and as a towing webbing for vehicles, vans and heavy vehicles.

Nautical: suitable for lifting and handling boats in shipyards and docks, to facilitate inspection and maintenance.

NOTES

Other lengths and capacities available on request.



The data in the table are indicative and subject to change without notice

VERTICAL	BASKET	BASKET 45°	BASKET 60°	LOOP
				


Capacity table in kg.

1000	2000	1400	1000	800
2000	4000	2800	2000	1600
3000	6000	4200	3000	2400
4000	8000	5600	4000	3200
5000	10000	7000	5000	4000
6000	12000	8400	6000	4800
8000	16000	11200	8000	6400
10000	20000	14000	10000	8000



Code	Height mm.	Length mt.	Packaging type	Colour
512.01010	50	1	single shrink film	purple (1)
512.01020	50	2	single shrink film	purple
512.01030	50	3	single shrink film	purple
512.01040	50	4	single shrink film	purple
512.01050	50	5	single shrink film	purple
512.01060	50	6	single shrink film	purple
512.01080	50	8	single shrink film	purple
512.02010	60	1	single shrink film	green (2)
512.02020	60	2	single shrink film	green
512.02030	60	3	single shrink film	green
512.02040	60	4	single shrink film	green
512.02050	60	5	single shrink film	green
512.02060	60	6	single shrink film	green
512.02080	60	8	single shrink film	green
512.03010	90	1	single shrink film	yellow (3)
512.03020	90	2	single shrink film	yellow
512.03030	90	3	single shrink film	yellow
512.03040	90	4	single shrink film	yellow
512.03050	90	5	single shrink film	yellow
512.03060	90	6	single shrink film	yellow
512.03080	90	8	single shrink film	yellow
512.04010	120	1	single shrink film	grey (4)
512.04020	120	2	single shrink film	grey
512.04030	120	3	single shrink film	grey
512.04040	120	4	single shrink film	grey
512.04050	120	5	single shrink film	grey
512.04060	120	6	single shrink film	grey
512.04080	120	8	single shrink film	grey

COLOURS

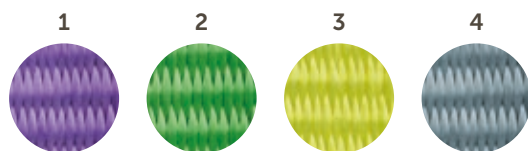

The data in the table are indicative and subject to change without notice

Code	Height mm.	Length mt.	Packaging type	Colour
512.05020	150	2	single shrink film	red (5)
512.05030	150	3	single shrink film	red
512.05040	150	4	single shrink film	red
512.05050	150	5	single shrink film	red
512.05060	150	6	single shrink film	red
512.05080	150	8	single shrink film	red
512.05100	150	10	single shrink film	red
512.06020	180	2	single shrink film	brown (6)
512.06030	180	3	single shrink film	brown
512.06040	180	4	single shrink film	brown
512.06050	180	5	single shrink film	brown
512.06060	180	6	single shrink film	brown
512.06080	180	8	single shrink film	brown
512.06100	180	10	single shrink film	brown
512.08030	240	3	single shrink film	blue (7)
512.08040	240	4	single shrink film	blue
512.08050	240	5	single shrink film	blue
512.08060	240	6	single shrink film	blue
512.08080	240	8	single shrink film	blue
512.08100	240	10	single shrink film	blue
512.08120	240	12	single shrink film	blue
512.10030	300	3	single shrink film	orange (8)
512.10040	300	4	single shrink film	orange
512.10050	300	5	single shrink film	orange
512.10060	300	6	single shrink film	orange
512.10080	300	8	single shrink film	orange
512.10100	300	10	single shrink film	orange
512.10120	300	12	single shrink film	orange

COLOURS

