

SafeTruck®

Lashing systems

DESCRIPTION AND FEATURES

Patented professional high tenacity polyester lashing system, available with two hooks sewn at the end of the webbing ("J" shaped and chassis) and equipped with a hardened steel ratchet to manually adjust its tension in a incremental and safe way.

The innovative pull-out handle can be removed in order to avoid any possible tampering or loosening of the load.

The polyester fibre gives excellent resistance to breakage, mineral acids, weathering and abrasion with very low elongation.

The sewings are managed by expert craftsmen to ensure maximum safety and reliability even after continuous and heavy use.

It is certified and complies with the European standard UNI EN 12195-2.

USE


Industry and construction: suitable for securing demanding, bulky and heavy loads, securing all types of material on vans, trucks, aircraft, containers, trolleys and platforms and for anchoring and securing tensile structures.

NOTES

Other lengths available on request.

The data in the table are indicative and subject to change without notice

Code	Height mm.	Breaking load daN	Length mt.	Type di hook	Packaging type	Colour
613.5466090	50	2000/4000	8,5 + 0,5	claw (3)	single shrink film	fluo orange (1)
613.5467090	50	2000/4000	8,5 + 0,5	chassis (4)	single shrink film	fluo orange
613.5566090	50	2000/4000	8,5 + 0,5	claw	single shrink film	fluo green (2)
613.5567090	50	2000/4000	8,5 + 0,5	chassis	single shrink film	fluo orange
613.00050	50	- - - -	- - - -	spare handle	single shrink film	- - - -

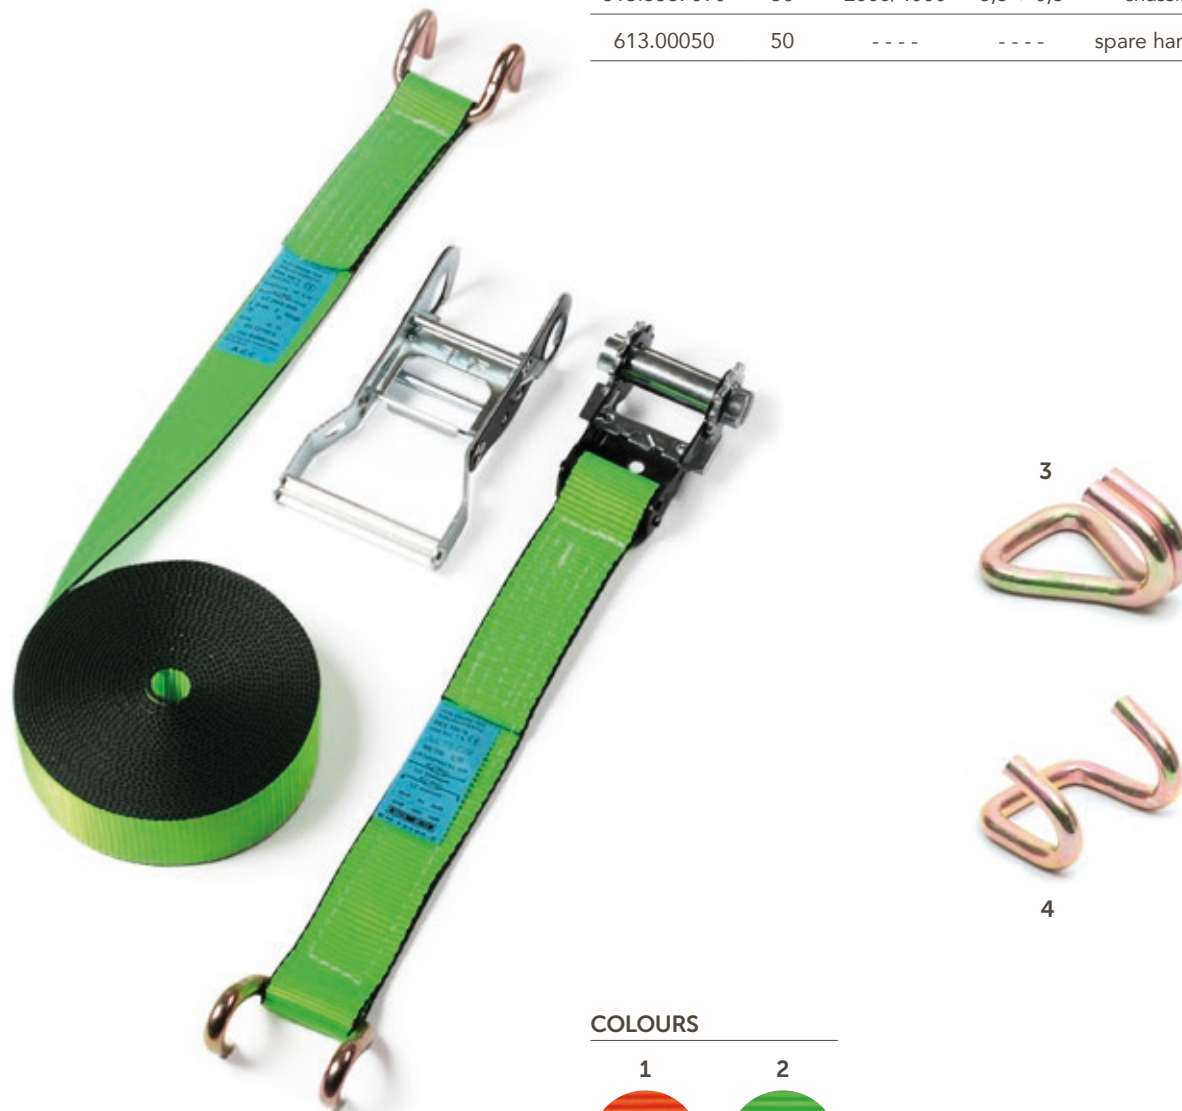

COLOURS

1



2



